


KENWOOD

Listen to the Future

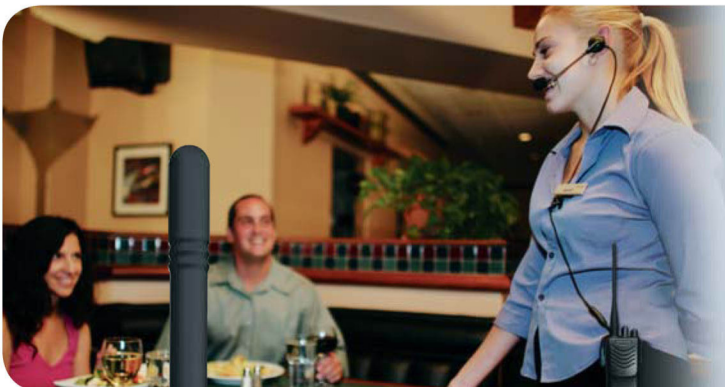

TK-P701

Compact VHF/UHF FM Portable Radios



The Thin Edge

Slim, thin and light – Kenwood's TK-P701 is supremely easy to handle and to operate. Yet this handy compact radio is extremely reliable, meeting the famously tough MIL-STD 810 C/D/E/F and G specifications. With its well-balanced performance, it makes perfect business sense.

All-in-one Package

The TK-P701 is ready for use immediately after purchase. It comes with all necessary accessories, including a charger, battery pack and antenna. A handy belt clip is also provided. There is no need to buy extra accessories for normal operation.

Supplied Accessories



- VHF Antenna
- UHF Antenna
- Battery
- Belt Clip
- Charger

Thin & Lightweight

Thinner and lighter – the TK-P701 is ideal for hooking on a belt or even slipping into a coat pocket. The slim design fits neatly in your hand and it weighs only 203g with the Li-Ion battery.



16 Channels with Scan Function

This compact, user-friendly portable offers a total of 16 channels, and each can be assigned a QT and DQT tone key to eliminate unwanted signals. You can also assign the 16th channel, if free, to the scan function. This added convenience means that the PF key is freed up for some other function.

Programmable Function Key with Hold

The side PF key can be programmed for enhanced operating ease, while the adjustable Hold feature doubles the number of functions at your finger tips.

Robust & Reliable

The TK-P701 is built to survive hard knocks, drops and all-weather environments. It meets or exceeds the stringent IP54 dust and water intrusion standards as well as the MIL-STD 810 C, D, E, F & G environmental standards.

OTHER FEATURES

- Output Power 5W (VHF) / 4W (UHF)
- QT / DQT
- DTMF Enc. (PTT ID, Autodial)
- Priority Scan
- Windows® Programming and Tuning
- Wide/Narrow Channel Bandwidth
- VOX ready
- Battery-Saver
- Busy Channel Lockout
- Time-Out-Timer
- Low-Battery Alert
- Tri-Colour LED
- Wired Clone



Options

■ **KNB-65L**
Li-Ion Battery
(7.2V, 1520mAh)



■ **KSC-35S**
Regular Charger



■ **KRA-22**
VHF Low Profile
Helical Antenna



■ **KRA-23**
UHF Low Profile
Helical Antenna



■ **KRA-26**
VHF Helical Antenna



■ **KRA-27**
UHF Whip Antenna



■ **KMC-45**
Speaker Microphone



■ **KMC-21**
Compact Speaker
Microphone



■ **KHS-1**
Headset
with VOX/PTT



■ **KHS-21**
Headset



■ **KWR-1**
Water Resistant Bag



All accessories and options may not be available in all markets. Contact an authorized Kenwood dealer for details and complete list of all accessories and options.

Specifications

	TK-P701	TK-P801		TK-P701	TK-P801
GENERAL			RECEIVER		
Frequency Range			Sensitivity (12 dB SINAD)		
Type 1	136 - 174 MHz	440 - 480 MHz	Wide / Narrow		0.25 μ V / 0.28 μ V
Type 2	—	400 - 430 MHz	Selectivity		
Number of Channels	16 channels		Wide / Narrow		70 dB / 60 dB
Channel Spacing			Intermodulation Distortion		
Wide / Narrow	25 kHz / 12.5 kHz		Wide / Narrow		65 dB / 60 dB
Channel Step	5, 6.25 kHz		Spurious Response	65 dB	60 dB
Operating Voltage	7.5 V DC \pm 20 %		Audio Distortion	Less than 5 %	
Battery Life (5-5-90 duty cycle, save off)			Audio Output	500 mW / 8 Ω	
with KNB-65L	Approx. 13 hours		TRANSMITTER		
Operating Temperature	-20°C ~ +60°C		RF Power Output (High / Low)	5 W / 1 W	4 W / 1 W
Frequency Stability	5 ppm	2.5 ppm	Spurious Response	65 dB	
Antenna Impedance	50 Ω		Modulation	16K0F3E / 11K0F3E	
Channel Frequency Spread	30 MHz	40 MHz	Wide / Narrow		
Dimensions (W x H x D), Projections not included			FM Hum & Noise		
Radio only	54 x 113 x 14 mm		Wide / Narrow		45 dB / 40 dB
with KNB-65L	54 x 113 x 24.9 mm		Audio Distortion	Less than 5 %	
Weight (net)			Measurements made per TIA/EIA 603 and specifications shown are typical. Kenwood follows a policy of continuous advancement in development. For this reason specifications may be changed without notice.		
Body only	Approx. 130 g		Windows® is a registered trademark of Microsoft Corporation.		
with KNB-65L	Approx. 203 g				
FCC ID					
Type 1	ALH437200	ALH437300			
Type 2	—	ALH437301			
FCC Compliance	Parts 15 / 90	Parts 15 / 90			

Applicable MIL-STD & IP

Standard	MIL 810C Methods/Procedures	MIL 810D Methods/Procedures	MIL 810E Methods/Procedures	MIL 810F Methods/Procedures	MIL 810G Methods/Procedures
Low Pressure	500.1/Procedure I	500.2/Procedure I, II	500.3/Procedure I, II	500.4/Procedure I, II	500.5/Procedure I, II
High Temperature	501.1/Procedure I, II	501.2/Procedure I, II	501.3/Procedure I, II	501.4/Procedure I, II	501.5/Procedure I, II
Low Temperature	502.1/Procedure I	502.2/Procedure I, II	502.3/Procedure I, II	502.4/Procedure I, II	502.5/Procedure I, II
Temperature Shock	503.1/Procedure I	503.2/Procedure I	503.3/Procedure I	503.4/Procedure I, II	503.5/Procedure I
Solar Radiation	505.1/Procedure I	505.2/Procedure I	505.3/Procedure I	505.4/Procedure I	505.5/Procedure I
Rain	506.1/Procedure II	506.2/Procedure II	506.3/Procedure II	506.4/Procedure III	506.5/Procedure III
Humidity	507.1/Procedure I, II	507.2/Procedure II, III	507.3/Procedure II, III	507.4	507.5/Procedure II
Salt Fog	509.1/Procedure I	509.2/Procedure I	509.3/Procedure I	509.4	509.5
Dust	510.1/Procedure I	510.2/Procedure I	510.3/Procedure I	510.4/Procedure I, III	510.5/Procedure I
Vibration	514.2/Procedure VIII, X	514.3/Procedure I	514.4/Procedure I	514.5/Procedure I	514.6/Procedure I
Shock	516.2/Procedure I, II, V	516.3/Procedure I, IV	516.4/Procedure I, IV	516.5/Procedure I, IV	516.6/Procedure I, IV

International Protection Standard

Dust & Water Protection IP54

To meet MIL810 and IP54, the 2-pin connector cover has to be connected.

Listen to the Future

Kenwood has always connected with people through sound. Now we want to expand the world of sound in ways that only Kenwood can, listening to our customers and to the pulse of the coming age as we head toward a future of shared discovery, inspiration and enjoyment.

Kenwood Corporation

Communications Equipment Division

1-16-2 Hakusan, Midori-ku, Yokohama-shi, Kanagawa, 226-8525 Japan

www.kenwood.com

